


Belts**SKF classical V-belts**

Example:	P H G	Z 3 6,5
SKF Prefix		
Z	10 millimetre (belt width) wrapped/envelope type	
A	13 millimetre (belt width) wrapped/envelope type	
B	17 millimetre (belt width) wrapped/envelope type	
C	22 millimetre (belt width) wrapped/envelope type	
D	32 millimetre (belt width) wrapped/envelope type	
ZX	10 millimetre (belt width) cogged raw edge type	
AX	13 millimetre (belt width) cogged raw edge type	
BX	17 millimetre (belt width) cogged raw edge type	
CX	22 millimetre (belt width) cogged raw edge type	
36,5	Belt length in inches	


SKF (narrow) wedge belts

Example:	P H G	S P Z 13 4 7
SKF Prefix		
SPZ	10 millimetre (belt width) wrapped/envelope type	
SPA	13 millimetre (belt width) wrapped/envelope type	
SPB	16 millimetre (belt width) wrapped/envelope type	
SPC	22 millimetre (belt width) wrapped/envelope type	
XPZ	10 millimetre (belt width) cogged raw edge type	
XPA	13 millimetre (belt width) cogged raw edge type	
XPB	16 millimetre (belt width) cogged raw edge type	
XPC	22 millimetre (belt width) cogged raw edge type	
3V	Wrapped/envelope belt with 3V/9J section (belt width)	
5V	Wrapped/envelope belt with 5V/15J section (belt width)	
8V	Wrapped/envelope belt with 8V/25J section (belt width)	
3VX	Cogged raw edge belt with 3VX/9NX section (belt width)	
5VX	Cogged raw edge belt with 5VX/15NX section (belt width)	
1347	Belt length in millimetres (SPZ, SPA, SPB, SPC, XPZ, XPA, XPB, XPC)	
250	Belt length in inches (3V, 5V, 8V, 3VX, 5VX)	


SKF HiTD belts

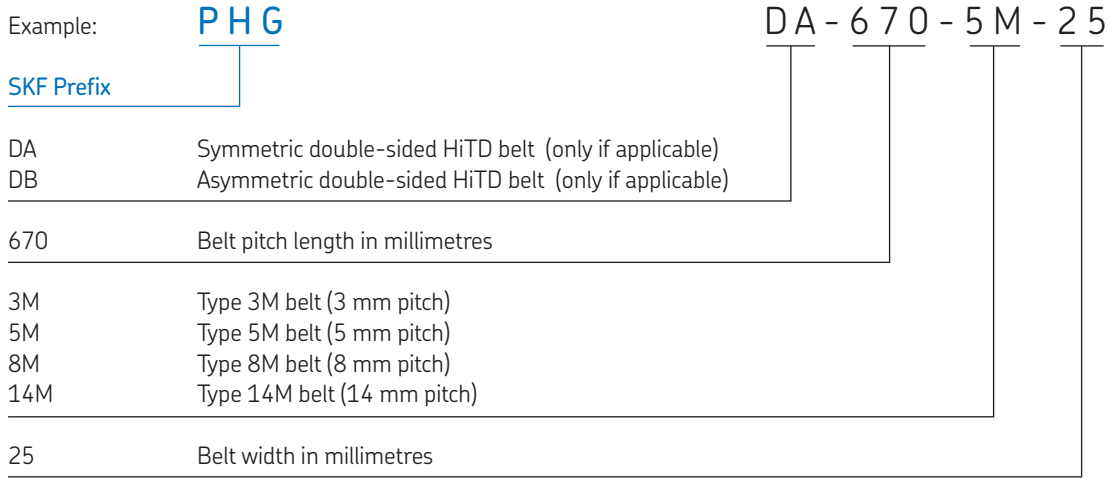


SKF hex belts

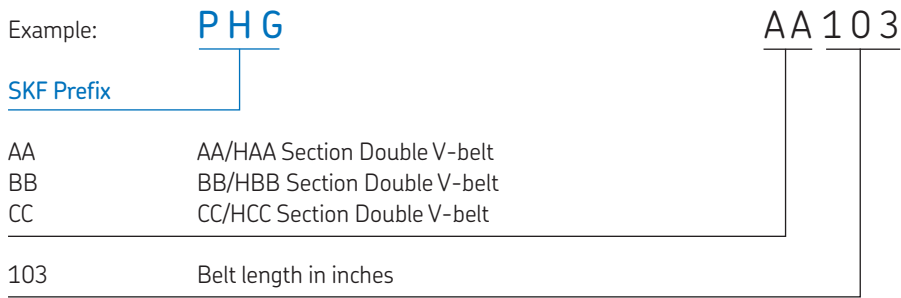


SKF classical timing belts

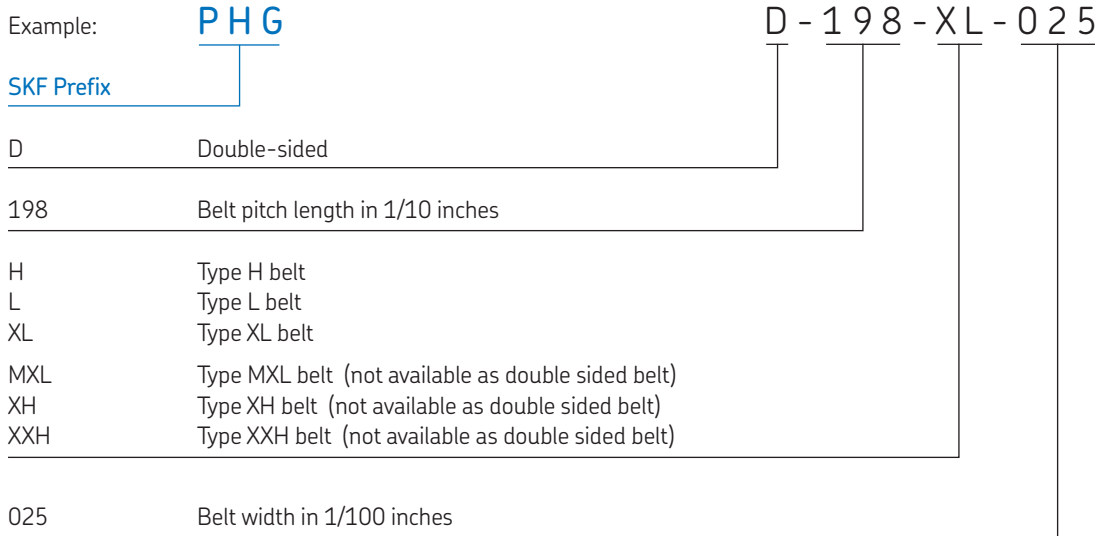

SKF metric timing belts

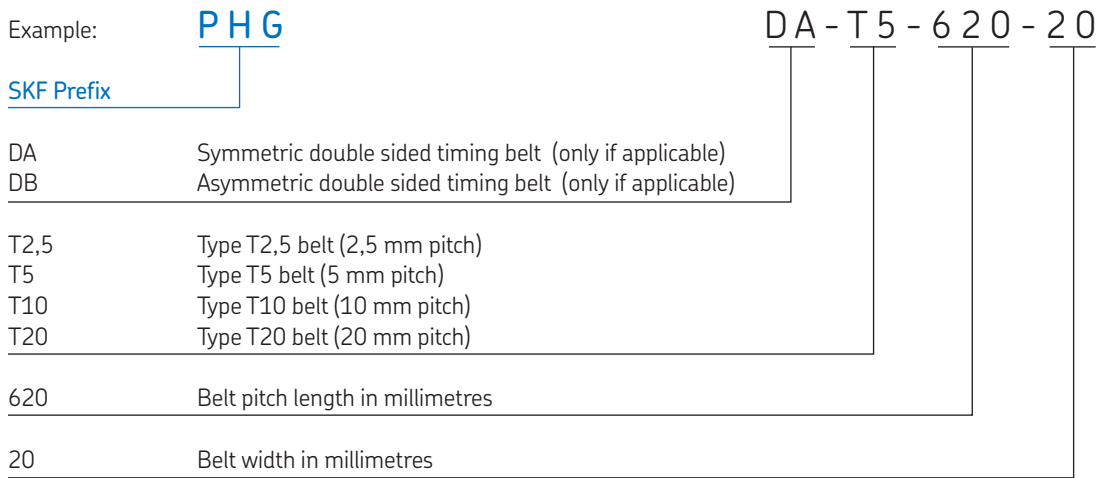

SKF ribbed belts

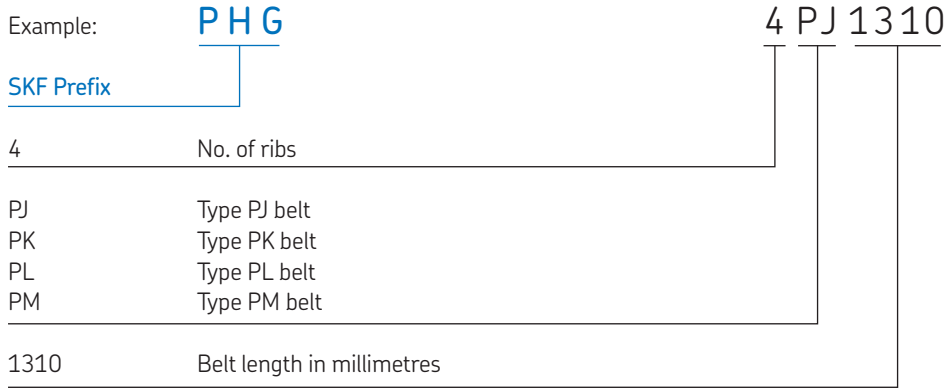

SKF banded belts

